




## Data Sheet Smart Beacon Outdoor Mini 5400

### Features

- Outdoor use according protection class IP65
- Two temperature resistant 2700mAh Lithium Thionyl Chloride Battery
- Easy assembly by screwing
- Bluetooth Low Energy® 4.2
- Eddystone & iBeacon compatible
- Management and setting of all parameters via blukii Manager and blukii Configurator App
- Individual pre-configuration possible (MOQ: 20 pieces)

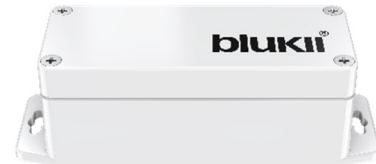

### Advertising

Beacon protocols	iBeacon, Eddystone (TLM, UID, URL) Default: iBeacon, Eddystone UID
Advertising interval	0,1s to 10s (adjustable) Default: 0,3s

### Radio

Standard	Bluetooth 4.2 (Bluetooth Low Energy)
Controller	Texas Instruments CC2640
Range	Up to 100m
Frequency range	2.402 to 2.480GHz
TX-Power (adjustable)	High(5dBm) / Medium(0dBm) / Low(-9dBm) / Lowest(-20dBm)
Antenna	Customized OnBoard SMD-Antenna

### Battery

Type	Lithium Thionyl Chloride
Model	2x EVE ER 14505 3,6V/2700mAh
Capacity	5400mAh
Replaceable	Yes
Lifetime at Advertising interval 0,3s (TX-Power: +5dBm)	5,1 years
Lifetime at Advertising interval 1s (TX-Power: +5dBm)	10 years (chemical lifetime 10 years)

### Mechanical specifications

Enclosure material	Polycarbonate
Colour	White
Protection Class	IP65
Flammability rating	UL94HB
Dimensions	90x35x35mm
Weight	103g

### Environmental requirements

Operating temperature	-40°C to +85°C
-----------------------	----------------

### Certifications

CE (2014/53/EU, 2011/65/EU)
-----------------------------